




ATLANTA CASTER
WHEEL KEEP YOU ROLLING

www.Atlantacaster.com

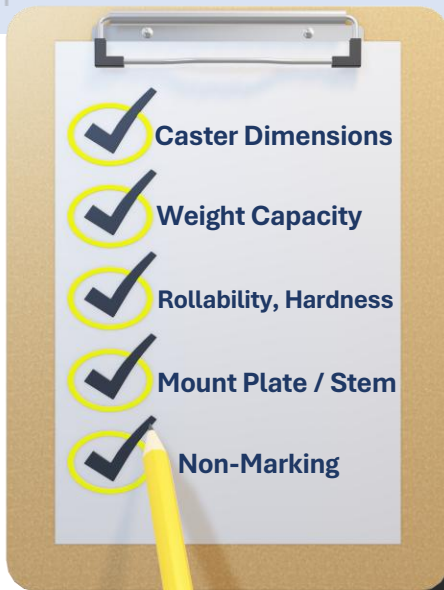

- ✓ **Caster Dimensions**
- ✓ **Weight Capacity**
- ✓ **Rollability, Hardness**
- ✓ **Mount Plate / Stem**
- ✓ **Non-Marking**



CALL 800-526-3087

Light-Duty

(RPR) Thermoplastic Rubber

Temp Range: -40 ° to 180 ° F

For Applications On: Chemicals, Aids, Alcohol, Water

Features Includes: Ease of Rolling, Floor Protection, Impact, Moisture, Chemical and UV Resistance.

Capacity: Up to 600 lbs.



(NF) Never Flat

Temp Range: -20 ° to 130 ° F

For Applications On: Asphalt, Tile, Grass, Rubber Tile, Ceramic Tile, Concrete Floor, Uneven Floor, Finished Wood

Features Includes: Ease of Rolling, Floor Protection, Impact and Moisture Resistant. Low Noise Operation, Maneuverability.

Capacity: Up to 350 lbs.



Medium-Duty

(PM) Ergonomic Radius Tread

Temp Range: -40 ° to 180 ° F

For Applications On: Finished Wood, Concrete Floor, Ceramic Tile, Terrazzo, Vinyl, Asphalt

Features Includes: Ease of Rolling, Low Noise Operation, Floor Protection. Impact, Abrasion, Moisture, and Chemical Resistance.

Capacity: Up to 1,500 lbs.



(NG) Nylon Glass Filled

Temp Range: -40 ° to 250 ° F

For Applications On: Solvents, Oil, Grease

Features Includes: Ease of Rolling, Ergonomic, Floor Operation, Impact, Corrosion, Moisture and Chemical Resistance. Maneuverability, Low Noise Operation.

Capacity: Up to 1,500 lbs.



Heavy-Duty

(FSR) Forged Steel

Temp Range: -50 ° to 800 ° F

For Applications On: Grease, Metal chips on floor, Oil

Features Includes: Ease of Rolling, Impact, Moisture, Chemical and Abrasion Resistance.

Capacity: Up to 20,000 lbs.



(UIR) Polyurethane on Cast Iron

Temp Range: -40 ° to 175 ° F

For Applications On: Finished Wood, Concrete Floor, Ceramic Tile, Vinyl, Asphalt, Rubber Tile, Oil, Alkaline

Features Includes: Ease of Rolling, Low Noise Operation, Floor Protection, Impact and Abrasion Resistance.

Capacity: Up to 9,000 lbs.

